



DYNA PLUS

*Low self discharge.
& longer life.*

**SMF
AGM-VRLA
BATTERY**



ULTRA LOW SELF DISCHARGING



HIGH GRADE LEAD CALCIUM ALLOY GRID FOR EXTENDED LIFE



QUICK DEEP DISCHARGE RECOVERY




ROBUST ABS CASING

SPECIFICATIONS CHART


Model	Rated Voltage	Rated Capacity (Ah) at 27°C	Dimensions (mm)					Terminal Type
			Length (±1) mm	Width (±1) mm	Height upto lid top (±2)mm	Total Height mm	Weight ± 3% (Kg)	
DY7.5-12	12V	7.5Ah	151	65	94	99.5	2.40	T1/T2
DY9.0-12	12V	9Ah	151	65	94	99.5	2.6	T1/T2
DY12-12	12V	12Ah	151	98	94	101	3.8	T1/T2
DY18-12	12V	18Ah	181	76	167	167.5	5.0	T3/T2
DY26-12	12V	26Ah	178	124	179	125	8.8	T12/T12-I(MS)
DY40-12	12V	40Ah	201	165	181	170	13.9	T6(M6)
DY65-12	12V	65Ah	350	166	181	178	20.2	T6(M6)
DY75-12	12V	75Ah	391	166	183	214	23.0	T11(M8)
DY100-12	12V	100Ah	407	173	235	220	30.0	T11(M8)
DY120-12	12V	120Ah	407	173	235	225	32.5	T11(M8)
DY150-12	12V	150Ah	452	172	239	238.5	38.0	T11(M8)
DY200-12	12V	200Ah	536	186	250	224	46.8	T11(M8)

*Specifications are under continuous improvement. Subject to change without notice.



Float Service Life

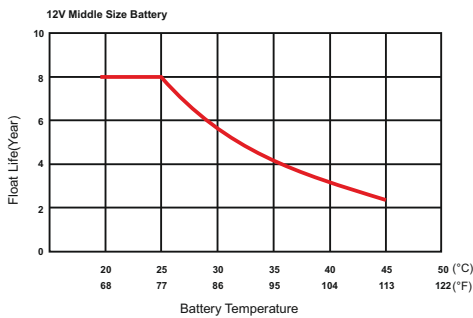


Float Charging Characteristics

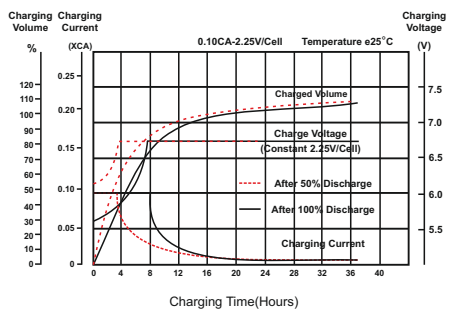


Discharge Characteristics

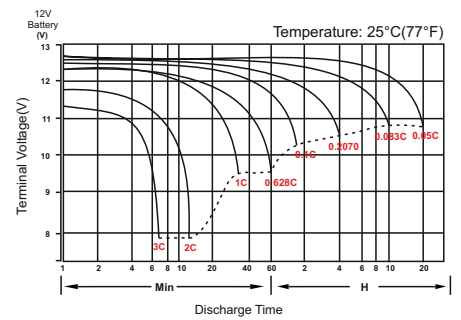


AGM TECHNOLOGY



HEAVY DUTY GRIDS



LOW SELF DISCHARGE



WIDE OPERATING TEMPERATURE

MODERN INDEXPO LIMITED INTERNATIONAL BUSINESS OFFICE

Kh. No. 337, Second Floor, MG Road, Sultanpur,
New Delhi-110030 (India)

MANUFACTURING UNIT

Plot No. 45-49, Sector-6, IIE, SIDCUL,
Pantnagar, Rudrapur, Uttarakhand 263153